



# Model: 2000 (Air-to-Air Energy Recovery Ventilator)

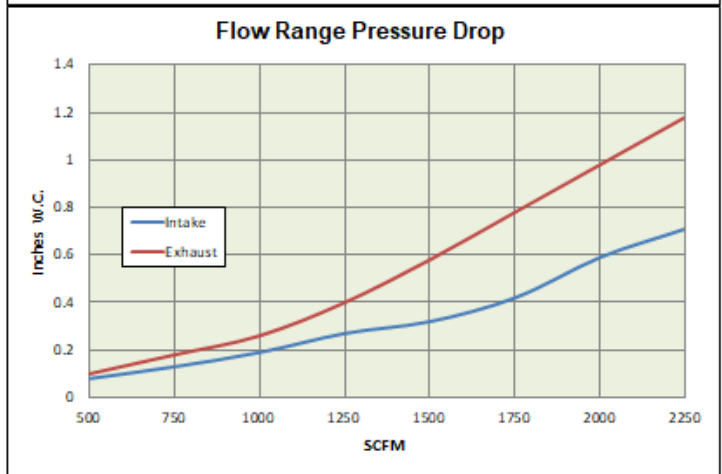


<b>Model Number:</b>	BPE-XE-MIR-2000, Energy Recovery Ventilator (ERV)
<b>Energy Transfer:</b>	Polymer Fixed Plate, Heat and Humidity Transfer
<b>Air Flow Range:</b>	500-2250 CFM
<b>Energy Efficiency Ratio (EER) – (Btu/W):</b>	(ARI 1060 at 95°) - Summer = 35.4 (ARI 1060 at 10°) - Winter = 82.4
<b>Net Weight:</b>	202 lbs.
<b>Dimensions:</b>	56" L x 24" W x 32-1/2" H
<b>External Finish:</b>	Galvanized Steel Sheet
<b>Typical Fan:</b>	Fantech FKD-14
<b>Power Source:</b>	115 V - Single Phase - 60 Hz
<b>Power Consumption</b>	495 W @ 1868 CFM

**Note:** For use in conditions below -10°F and/or 40% relative humidity, contact BPE for application assistance. Interior aligned with Reflectix Semi-Rigid Insulations (R-5 RMAX)

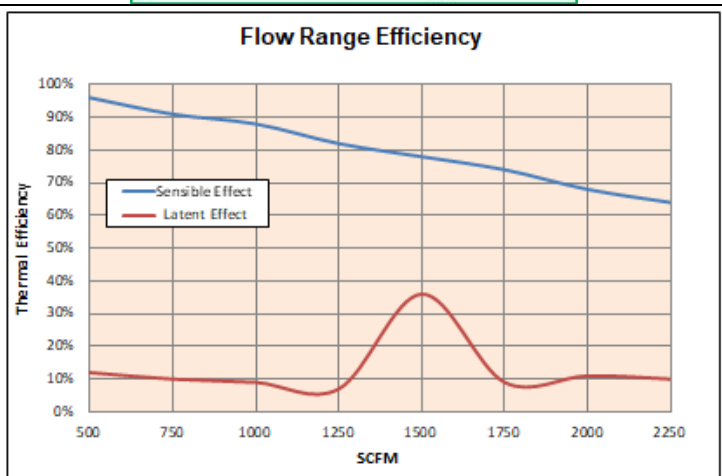



Ductwork Connections

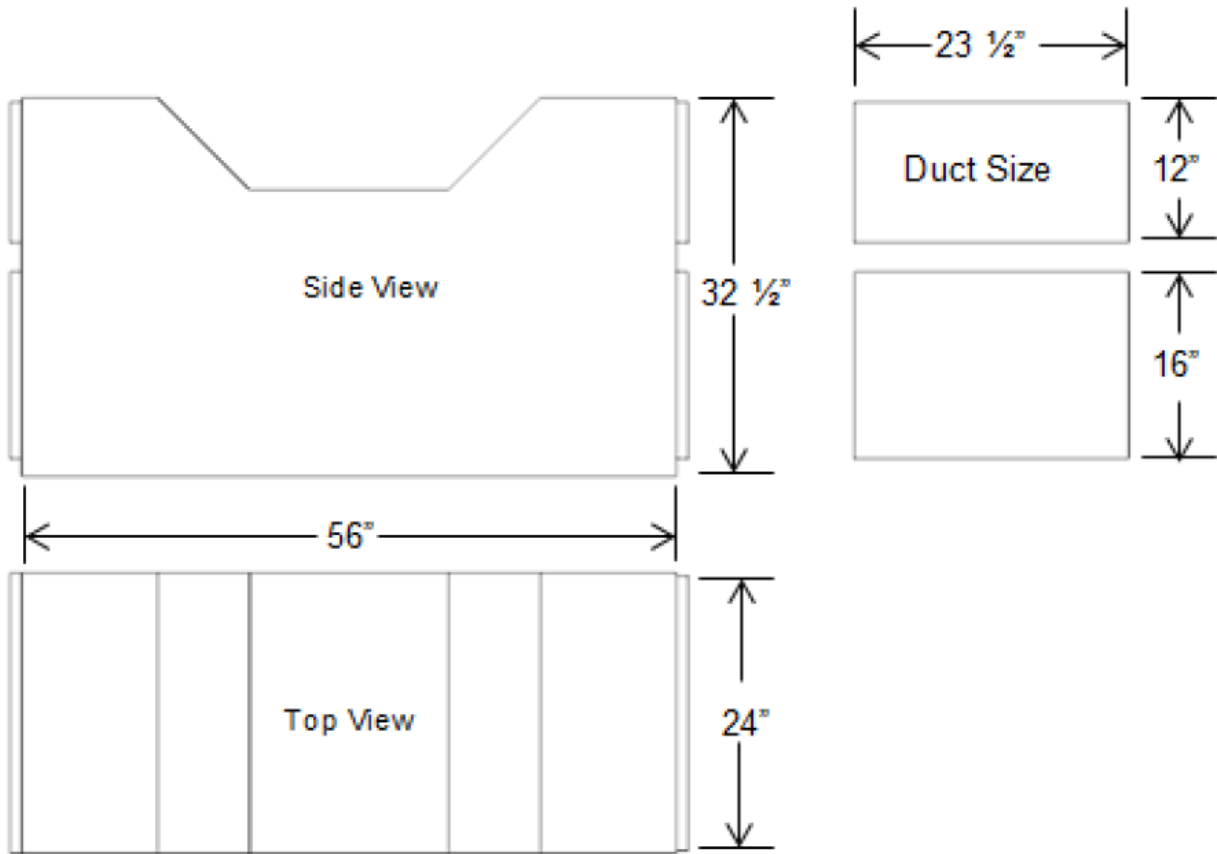

Manufacturer reserves the right to modify dimensions without notice.